



Centor CF cavity slider

ALL-STEEL FRAME
CONSTRUCTION

EASY TO INSTALL

PERFECT LIFE-LONG
OPERATION

IDEAL FOR HIGH
HUMIDITY AREAS

Door Weight	Application
Standard to 60kg	A9 track & precision ground bearing carriers

Stud Size	Application
64mm	Suits 35mm doors
70mm	Suits 35mm doors
75mm	Suits 35mm doors
90mm	Suits 35-40mm doors
100mm	Suits 35-40mm doors

Door Width	Framing Width (stud to stud)
620mm	1255mm single or 2470mm double
720mm	1455mm single or 2870mm double
770mm	1555mm single or 3070mm double
820mm	1655mm single or 3270mm double
870mm	1755mm single or 3470mm double
920mm	1855mm single or 3670mm double
Custom to 1200mm	width to suit

Door Height	Framing Height (finished floor to head)
2040mm	2135mm
2340mm	2435mm
Custom 2040 to 2340mm	height to suit

Jamb Fit	Application
Flush to jamb	Use rubber bumper 5FS*
Proud from jamb (flush pull)	Use adjustable track stop 9TS*

* supplied in kit

The Centor CF all-steel frame cavity slider offers easy installation and lasting function. The CF is guaranteed not to warp – regardless of moisture. The CF's flawless operation will make you and your doors look great.

Ease of installation

The CF's steel construction is not affected by moisture, so the Centor system can be installed at any time, even before the roof is completed. The jamb timber is sanded and ready to paint and the track is made from light, easy-to-handle aluminium.

The CF is as easy to install as timber, but will not split. The frame is pre-drilled with fixing points to accurately position screws or nails.

Style and performance

The CF comes in a range of standard frame sizes. Thanks to precision robotic welding, the CF comfortably suspends doors up to 60kg. The CF's four-wheel carriers have nylon tyres on high-performance steel bearings, permanently contained within jump-proof tracks.


Because the all-steel frame remains straight and true, the CF operates flawlessly even in high humidity areas such as en suites – no more unsightly sliding scratches on doors.

Warranty


Exhaustive factory cycle testing and many years in the field have proven the CF's performance, so Centor confidently offers a 10-year warranty.

Architectural Detail

End view

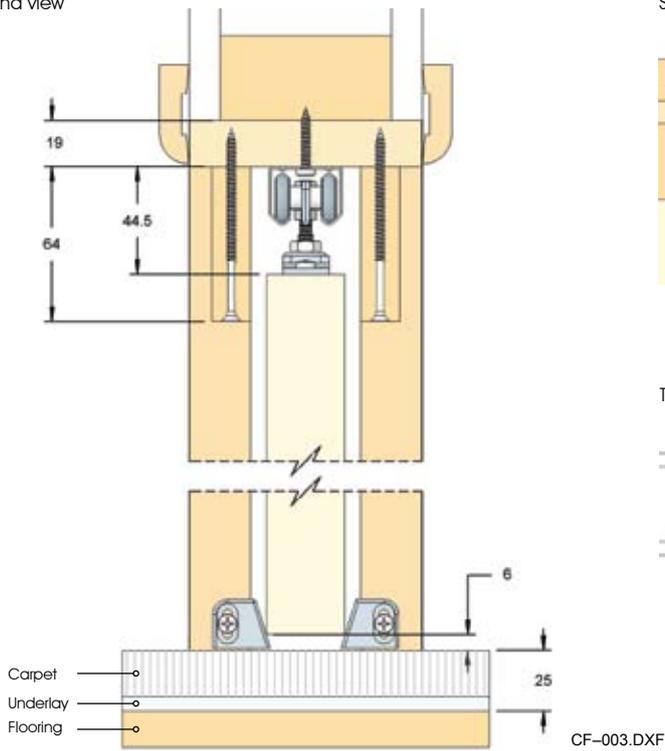


Side view

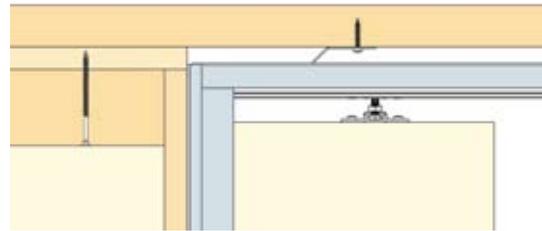

CF-001.DXF

Top view

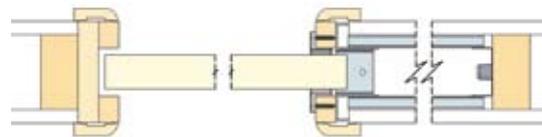


CF-002.DXF

STANDARD CARRIERS AND TRACK (60kg door panel)

PART	Product code	DESCRIPTION
	94CCSM	4 wheel carrier stainless steel brackets, precision bearings
	9TA	extruded aluminium

ACCESSORIES

PART	Product code	DESCRIPTION
	9TS	Track stop Used to stop doors at end of track, or where two doors meet together on a single track
	CSNG	Floor guide Floor guides provide easy side to side adjustment of the door
	5FS	Bump stop Used inside the cavity to cushion the door when fully opened